



- 1 HARNESS LOCATION. STANDARD WIRING INCLUDES 16 GA LEADS 3 FEET IN LENGTH.
- 2 INSTALL WINDGUARD FASTENER AFTER TIGHTENING BASE FASTENERS. DIMENSIONAL DATA ONLY. CONSULT MANUFACTURER FOR SPECIFIC MODEL REQUIREMENTS.
- 3
- 4 ALL MODELS TO INCLUDE WINDGUARD (SHOWN).
- 5 INSTALLED THICKNESS: 3.5"
- 6 MAXIMUM PROTRUSION AT FULL OPEN POSITION: 23.5" (MEASURED FROM BACK MOUNTING SURFACE OF UNIT).
- 7 STOP ARM BASE MUST BE GROUNDED TO SCHOOL BUS BODY.
- 8 WIRE IDENTIFICATION: RED - STOP ARM POWER
BLUE - STOP ARM ACTIVATION
WHITE - GROUND



ITEM	QTY	QTY	QTY	QTY	QTY	P/N	DESCRIPTION
1	1	1	1	1	1	0610	5 SERIES BASE ASSEMBLY
2	1	1	1	1	1	970	BLADE-HI-INT, W/LED LIGHTS
3	1	1	1	1	1	980	BLADE-HI-INT, STROBING LED
4	1	1	1	1	1	XXXX	BLADE-REFLECTIVE W/LIGHTS
5	1	1	1	1	1	560	BLADE-REFL. W/STROBE LIGHTS
6	1	1	1	1	1	800-1	BLADE-HI INTENSITY W/LIGHTS
7	1	1	1	1	1	900-1	BLADE-HI INTENSITY W/LIGHTS
8	1	1	1	1	1	00290	STROBING LED KIT
9	2	1	1	1	1	00295	LED BULB ASSEMBLY
10	4	4	4	4	4	00142	NUT-1/4-20 NYLON, LOCK
11	4	4	4	4	4	00104	WASHER-NYLON,FLAT

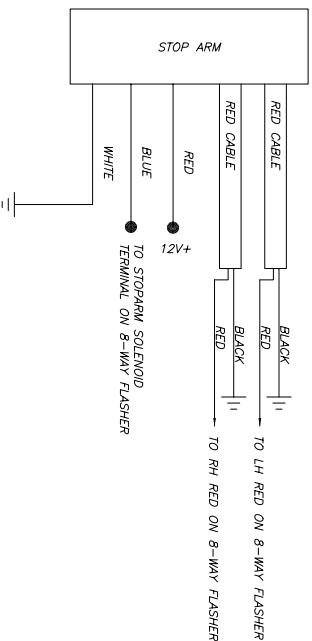

SPECIALTY
MANUFACTURING INC.

10200 PINEVILLE ROAD
P.O. BOX 790
PINEVILLE, NC 28134

DRAWN BY: E. SWANINGER DATE: 03/24/04

MATERIAL: SEE CHART

FINISH: SEE B/M

SCALE: 1 OF 1 SHEET: B

TOLERANCES (EXCEPT AS NOTED): DECIMAL: ± .010 ANGULAR: ± 1°

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY DATA OF SPECIALTY MANUFACTURING INC. AND IS NOT FOR DISSEMINATION OR DISCLOSURE IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SUBMITTED, EXCEPT AS EXPLICITLY AUTHORIZED IN WRITING BY SPECIALTY MANUFACTURING INC.

STOP ARM-6 SER., LED LIGHTS

DIRECTOR: C./ACAD	DRAWING/PART NO. 006970	REV. A
FILE NAME: 006970A		