



MICROSWITCH FOR "HATCH ALARM" DEVICE
ON 9253-0301 ONLY



VIEW A-A

ITEM	PART NO.	QTY	DESCRIPTION
1	0093179	1	LID ASSY, PROLO (WHITE)
2	0093320	1	ASSY, TRIM RING, PROLO (WHITE) W/ALARM
3	0093320	1	ASSY, TRIM RING, PROLO (WHITE) NO ALARM
4	008715	1	GASKET, PROLO
5	008716	1	DECAL, "EMERGENCY" BLACK
6	008717	1	DECAL, "EXIT" BLACK
7	008794	1	DECAL, "EMERGENCIA" SPANISH
8	008795	1	DECAL, "SALIDA DE" SPANISH
9	008765	1	DECAL, HATCH MODEL NO.
10	008714	1	DECAL, "SALIDA: PAR VIEJTA,"
11	0093469	1	DECAL, "TO OPEN VENTILATOR"
12	008718	1	DECAL, "TURN HANDLE & PUSH"
13	008548	1	DECAL, ONE WAY INSIDE ARROW, RED
14	009341	1	DECAL, PROLO TO CLOSE...
15	008846	2	SCR, 1/4-20X1 HH SHOULDER, W/NUTS
16	008905	2	WASHER, 3-WAVE
17	008892	2	WASHER, 1/4 ID X 7/16 OD SS FLAT

9253-0300
WHT, NO ALARM
9253-0301
WHT, W/ALARM

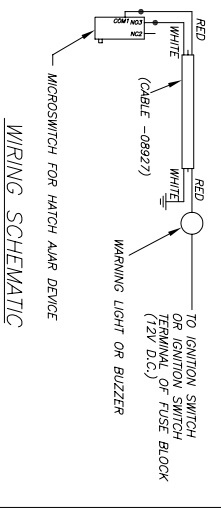

WIRING SCHEMATIC

NOTES

- HATCH MEETS OR EXCEEDS FMSS 217 FOR SCHOOL BUS APPLICATIONS
- HATCH MEETS OR EXCEEDS FMSS 302 FOR FLAMMABILITY OF INTERIOR MATERIALS.
- HOLE CUT-OUT FOR HATCH INSTALLATION TO BE 23.5" X 23.5" WITH 4.0" RADIUS CORNERS WITH A 7/8" MINIMUM CLEARANCE ON THE TOP METAL SHEET TO BE FREE OF FASTENERS OR OTHER DISCONTINUITIES.
- CONTINUOUS LOOP ADHESIVE MOUNT GASKET PROVIDED WITH HATCH TO BE INSTALLED ON TOP METAL SHEET CUT-OUT WITH SPLICE LOCATED AT REAR OF HATCH.
- HATCH SUPPLIED WITH "EMERGENCY EXIT" & OPERATING INSTRUCTIONS ON INSIDE OF HATCH LID.
- SWITCHES SUPPLIED WITH 24" LONG LEADS.
- HATCH LID MATERIAL: ASA CAPPED ABS, INTERIOR FRAME: ABS.

9253-0301	ENGLISH/SPANISH/WHITE/ALARM
9253-0300	ENGLISH/SPANISH/WHITE/NO ALARM
10200 PINEVILLE ROAD P.O. BOX 790 PINEVILLE, NC 28134	
SCALE: 1 OF 1 TOLERANCES: (EXCEPT AS NOTED) DECIMAL: .xxx ± .010 xx ± .03 ANGULAR: ± 1°	DRAWN BY: DATE: 12/19/06 MATERIAL: SEE BOM FINISH:
DESCRIPTION: HATCH, PROLO, WHT, R200" NO. HNDL, NO. ALARM, ENG/SPA	DRAWING PART NO. 9253-0300 REV. A